Application Alley

PARTNER | SOLVE | DELIVER

Portable Defibrillators - Reed Relays

Portable Defibrillators Use Reed Relays in their High Voltage Charging Circuit



Custom Engineered Solutions for Tomorrow

Application Alley

Portable Defibrillators - Reed Relays Portable Defibrillators Use Reed Relays in their High Voltage Charging Circuit

Introduction

Every year many thousands of peoples' lives are saved having been resuscitated with a defibrillator after their heart had stopped beating. Many times this happens in a hospital environment. However, many people die every day from heart attacks that were not able get to the hospital in time to be resuscitated. Several medical equipment manufacturers have developed portable defibrillators that are placed in airports, bus stations, office buildings, in the home, and several places where people are apt to congregate. These portable defibrillators are battery operated and therefore, the electronics chosen to run the charging circuit must use low average power. The circuit must also be comprised with only very high reliability components. Standex-Meder's high voltage reed relays have been selected to be directly used in the high voltage charging circuit.




Figure 1. BE Physical layout

Features

- Several hundred million operations
- Ability to withstand up to 4000 volts across the contacts
- Ability to Switch up to 1000 Volts
- Ability to hold off 5000 volts between switch to coil
- · Contacts dynamically tested

Applications

• Ideal for use in portable defibrillators

Reed relays are reliably used in portable battery operated defibrillators

Instruments that directly save lives require the best possible designs, and must use the most reliable components available. Portable defibrillators are designed so that anyone can pick up and use them with no prior experience. Portable defibrillators are only used for emergencies under life and death situations.

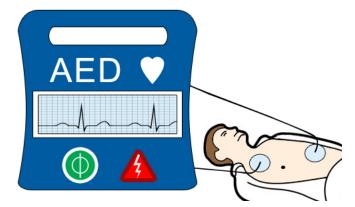


Figure 2. Defibrillator with reed relay shown shocking patient with no heart rhythm.

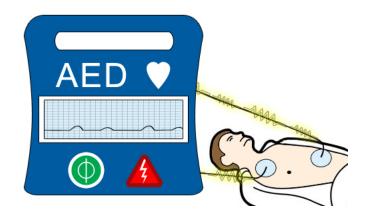


Figure 3. Defibrillator with reed relay has restored normal heartbeat with no harm to the patient.



Application Alley

Portable Defibrillators - Reed Relays Portable Defibrillators Use Reed Relays in their High Voltage Charging Circuit

They are only used when a person has suffered a heart attack; and is usually lying prone with their heart stopped. When the defibrillator is activated, the paddles are placed on the person's chest, and then a high voltage/current pulse is applied across the heart with the intent to shock the heart back into operation. Sometimes, repeated shocks may be required before the heart starts operating again. When repeated shocks are required, a charging circuit in the defibrillator is activated to charge the responsible circuit that will supply the next power burst. This charging circuit needs to be switched in and out in a reliable manner in a guaranteed fault free mode. Standex-Meder's special BE series design was chosen to meet the above requirements.

Specifications (@ 20°C) BE Series							
	Min	Тур	Max	Units			
Coil Characteristics*							
Coil resistance	45	50	55	Ohms			
Coil voltage		5		Volts			
Pull-In max.			3.3	Volts			
Drop-Out min.	0.65			Volts			
Load characteristics							
Contact rating			100	Watts			
Switching voltage	0		1000	Volts			
Switching current	0		1.0	Amps			
Carry current	0		2.5	Amps			
Max carry current for 5 Ms			5.0	Amps			
DC contact resistance			150	mΩ			
Dynamic contact resistance			200	mΩ			
Breakdown voltage	3000			Volts			
Operate time			1.0	msec			
Release time			100	µsec			
Operate temp	-20		70	°C			
Storage temp	-40		85	°C			
*Coil parameters will vary by 0.2% / 1 °C							

Standex-Meder's design is a 2 pole normally open relay that has a special spacing between

the switches and coil to maintain a long path length, thereby insuring a guaranteed high isolation voltage between the coil and the switches. The design uses no internal solder joints on the reed switches to insure switching reliability. The reed switches are selected to withstand 4000 Volts minimum across the open contacts. The contacts can also switch up to 1000 volts as well.

Standex-Meder's reed relays use hermetically sealed reed switches that are further packaged in strong high strength plastic, and can therefore be subject to various environments without any loss of reliability.

it can operate reliably over a wide temperature							
Through Hole Reed Relay Series							
Dimenstions							
		mm	inches	Illustration			
Series							
BE Special	W	20.4	0.803				
Series	• •	20.4	0.000	C. A.			
	Т	10.2	0.401				
		0.101					
	н	33.0	1.299				
		00.0					

The reed relay is an excellent choice because it can operate reliably over a wide temperature

range, and represents an economical way to carry out billions of switching operations.

Find out more about our ability to propel your business with our products by visiting www.standexmeder.com or by giving us a hello@standexelectronics.com today! One of our brilliant engineers or solution selling sales leaders will listen to you immediately.

