


# DIW Series

## DIP Type. Wet Reed Relay

### Features

- High Power Mercury Reed Relay.
- Low Stray Capacitance.
- High Life Expectancy.
- Diode Magnetic shield and Options.

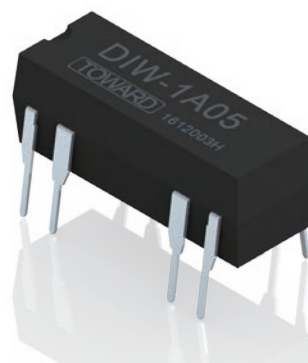

### Order Code

DIW/DIWN-1A-XX X-X-X  
a b c d

a : Nominal Coil Voltage : 05=5VDC, 12=12VDC, 24=24VDC  
b : Nil=Standard Type, D=Diode, S=Magnetic Shield,  
N=Diode+Magnetic Shield  
c : Special Code  
d : Nil=Pin2 and Pin13 not Connected,  
T=Pin2 and Pin13 Connected

### Coil Data-Standard Type 1 Form A (at 20°C )

Nominal Voltage DC $\pm 10\%$ [V]	Coil Resistance $\pm 10\%$ [ohm]	Nominal Current (mA)	Max. Operate Voltage (VDC)	Min. Release Voltage (VDC)
5	150	33.3	3.8	0.5
12	500	24	9	1
24	1440	16.7	18	2

### Contact Rating


Relay Model	DIW	DIWN
Max.Switching Power	50W	
Max.Switching Voltage	1500VDC	500VDC
Max.Switching Current	2A	
Max.Carry Current	3A	



## Specification

Relay Model	DIW	DIWN
Contact Resistance	100mΩ	
Operate Time (Incl.bounce)	2.0mS	1.2mS
Release Time	1.5mS	1.0mS
Insulation Resistance	Open Contacts $1 \times 10^{10} \Omega$	
	Contacts to Coil $1 \times 10^{10} \Omega$	
Dielectric Strength	Open Contacts 2000VDC	Open Contacts 1500VDC
	Contacts to Coil 1500VDC	Contacts to Coil 1500VDC
Capacitance(between open contacts)	0.3pF	
Vibration(10-55Hz)	10G	20G
Shock Resistance(11ms, 1/2sin Wave)	30G	50G
Operating Temperature	$-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$	
Storage Temperature	$-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$	
Life Expectancy of Mechanical	$1 \times 10^9$ Operations	
Life Expectancy of Electrical	500VDC, 0.1A, $5 \times 10^7$ Operations (R.L.)	

## Dimensions (Unit : mm)

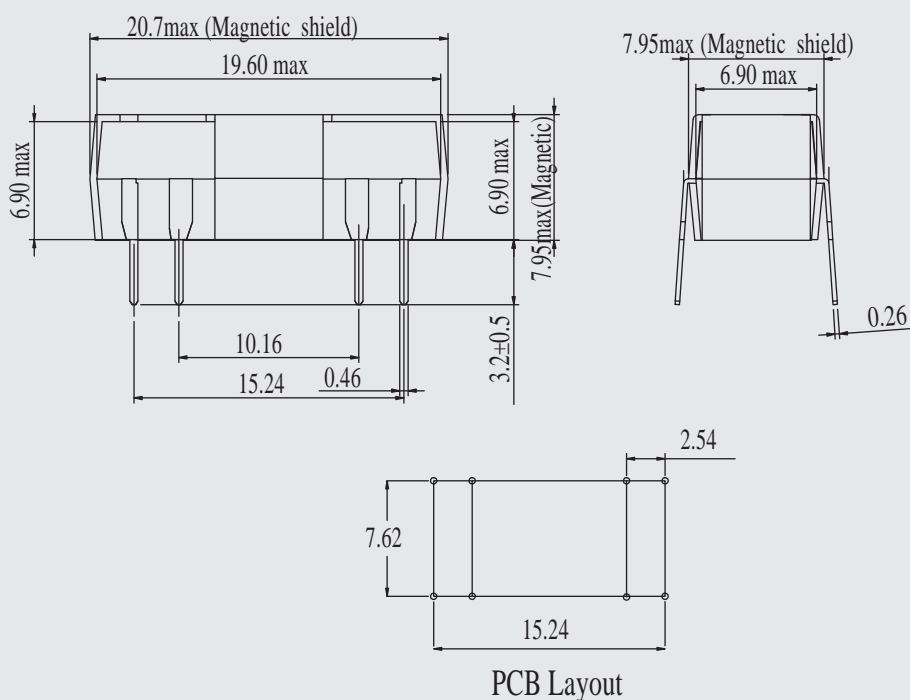

## Wiring Diagrams (Bottom View)

