

POWER RELAY

1 POLE - 20A, 3.0mm contact gap

FTR-K2G Series

■ FEATURES

- Contact gap min. 3.0mm
- Full disconnection
- 1 Pole, 1 Form A
- Maximum inrush current 120A (TV-8) (UL) (VDE)
- High insulation
Reinforced insulation
Insulation distance between coil and contact:
 - Clearance min. 8.0mm, creepage min. 9.5mm
 - Dielectric strength: 5KV
 - Surge strength: 10KV
- Heat resistance, flammability
Class B (130°C) coil wire class,
flammability UL94V-0 (plastic)
- Safety standards
UL, CSA, VDE approved
- Flux proof type. RT II
- RoHS compliant
Please see page 6 for more information



■ PARTNUMBER INFORMATION

[Example] FTR-K2G A K 012 T
 (a) (b) (c) (d) (e)

(a)	Relay type	FTR-K2G	: FTR-K2G-Series
(b)	Contact configuration	A	: 1 form A
(c)	Coil power	K	: Standard type (1,000mW)
(d)	Coil rated voltage	012	: 5.....110 VDC Coil rating table at page 3
(e)	Contact material / TV type	T	: AgSnO ₂ / TV-8

Actual marking does not carry the type name : "FTR"
 E.g.: Ordering code: FTR-K2GAK012T Actual marking: K2GAK012T

■ SPECIFICATION

Item			FTR-K2GAK () T
Contact Data	Configuration		1 form A (SPST-NO)
	Construction		Single
	Material		AgSnO ₂
	Resistance (initial)		Max. 100mΩ at 1A, 6VDC
	Contact rating (resistive)		20A / 250VAC
	Max. carrying current * ¹		25A
	Max. inrush current		120A / 250VAC
	Max. switching voltage		400VAC
	Max. switching power		5,000VA
	Min. switching load * ²		100mA, 5VDC (reference value)
Life	Mechanical		Min. 1 x 10 ⁶ operations
	Electrical	Resistive	Min. 100 x 10 ³ operations
		Lamp load (TV-8)	Min. 25 x 10 ³ operations
Coil Data	Rated power		Approximately 1,000mW
	Operate power		Approximately 420mW
	Operating temperature range		-40 °C to +70 °C (no frost)
Timing Data	Operate (at nominal voltage)		Max. 30ms (without bounce)
	Release		Max. 15ms (no diode)
Insulation	Resistance (initial)		Min. 1,000MΩ at 500VDC
	Dielectric strength	Open contacts	2,000VAC (50/60Hz) 1min
		Coil to contacts	5,000VAC (50/60Hz) 1min
	Surge strength	Coil to contacts	10,000V / 1.2 x 50μs standard wave
	Clearance		8 mm
	Creepage		9.5 mm
	EN61710-1, VDE0435	Voltage	250V
		Pollution degree	3
		Material group	III a
		Category	B / 250V
Other	Vibration resistance	Misoperation>1us	10 to 55Hz double amplitude 1.5mm
		Endurance	10 to 55Hz double amplitude 1.5mm
	Shock	Misoperation>1us	100m/s ² (11 ± 1ms)
		Endurance	1,000m/s ² (6 ± 1ms)
	Weight		Approximately 34g
	Sealing		Flux proof, RT II

* 1 Need to consider the heat when mounted on PCB at carry currents > 10A. Please confirm actual condition.

* 2 Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

■ COIL RATING

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance +/- 10% (Ohm)	Must Operate Voltage (VDC) *	Must Release-Voltage (VDC) *	Rated Power (mW)
005	5	25	3.25	0.25	1,000
006	6	36	3.9	0.3	
009	9	81	5.85	0.45	
012	12	145	7.8	0.6	
018	18	325	11.7	0.9	
022	22	485	14.3	1.1	
024	24	580	15.6	1.2	
048	48	2,200	31.2	2.4	1,050
060	60	3,600	39	3	1,000
110	110	13,000	71.5	5.5	930








Note: All values in the tables are valid for 20°C and zero contact current.

* Specified operate values are valid for pulse wave voltage.

■ SAFETY STANDARDS


Type	Compliance	Contact rating
UL	UL 508 CSA22.2 No.14 UL/CSA 60950-1 E63614	Flammability: UL 94-V0 (plastics)
		20A, 277VAC (resistive) TV-8, 120 VAC
VDE	IEC/EN61810-1 EN60065 clause 14.6.1 EN60335-1 clause 15.3; 16.3; 29.1; 29.2; 29.3 EN60730-1 clause 12.2; 13.2; 20.1; 20.2; 20.3	20A, 250VAC ($\cos\phi=1$), 70°C 8A/120A, 250VAC, 70°C

CHARACTERISTIC DATA

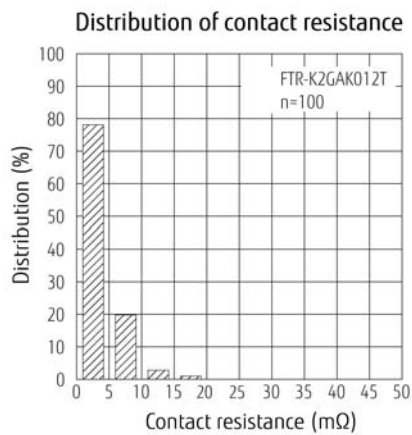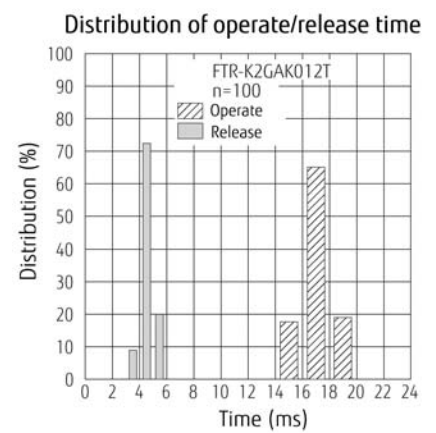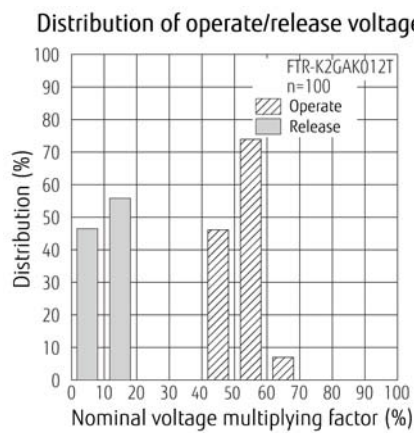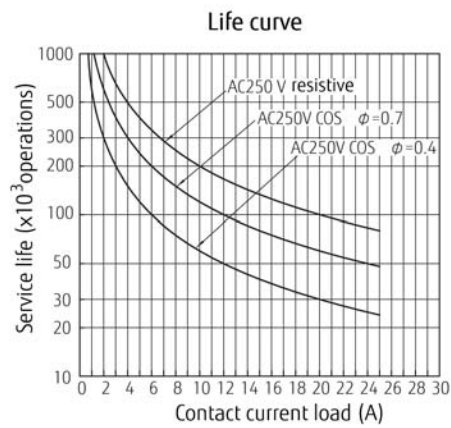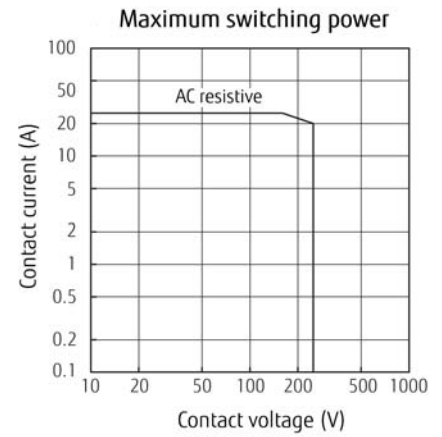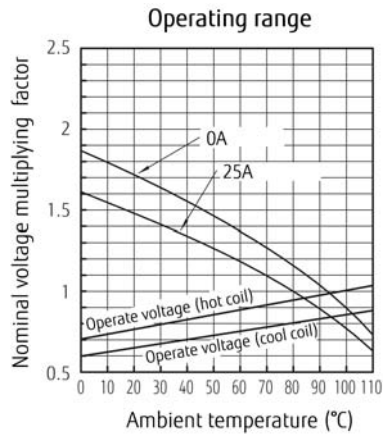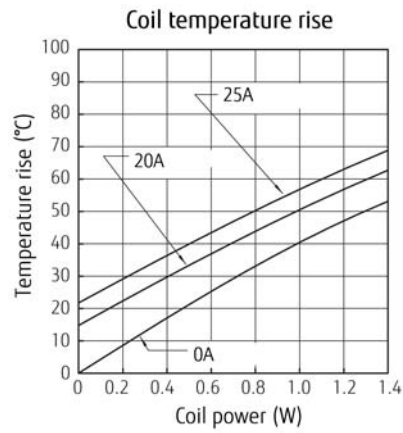


■ DIMENSIONS

● Dimensions

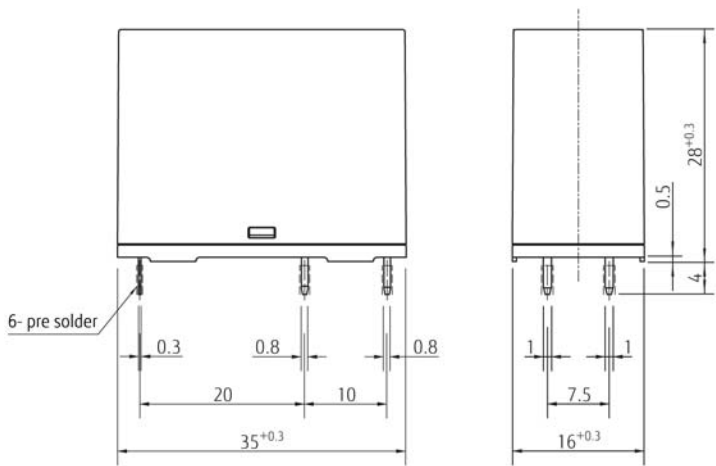


● Schematics
(BOTTOM VIEW)

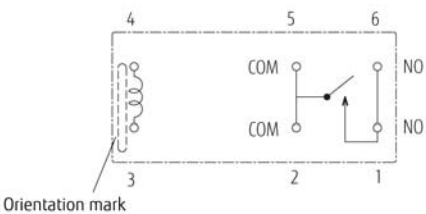

Unit: mm

● PC board mounting
hole layout
(BOTTOM VIEW)

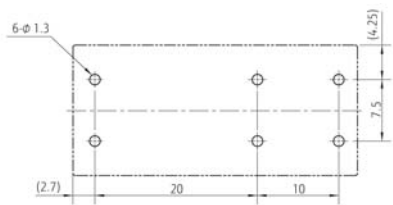

RoHS Compliance and Lead Free Information

1. General Information

- All relays produced by Fujitsu Components are compliant with RoHS directive 2011/65/EU including amendments.
- Cadmium as used in electrical contacts is exempted from the RoHS directives.
As per Annex III of directive 2011/65/EU.
- All relays are lead-free. Please refer to Lead-Free Status Info for older date codes at:
<http://www.fujitsu.com/downloads/MICRO/fcai/relays/lead-free-letter.pdf>
- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified.
This material has been verified to be compatible with PbSn assembly process.

2. Recommended Lead Free Solder Condition


- Recommended solder Sn-3.0Ag-0.5Cu.

Flow Solder Condition:

Pre-heating: maximum 120°C
within 90 sec.
Soldering: dip within 5 sec. at
255°C ± 5°C solder bath
Relay must be cooled by air immediately
after soldering

Solder by Soldering Iron:

Soldering Iron 30-60W
Temperature: maximum 350-360°C
Duration: maximum 3 sec.

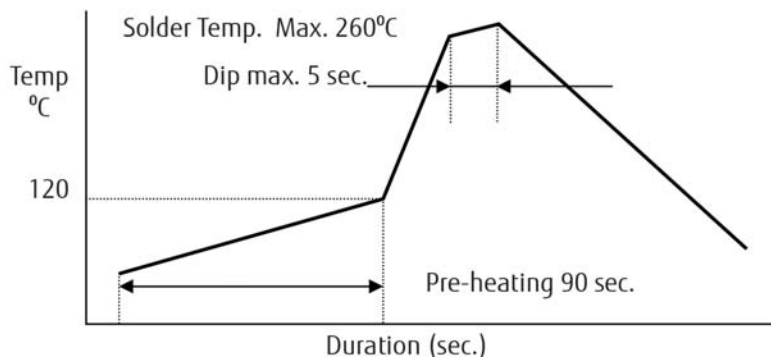

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

Fujitsu Components International Headquarter Offices

Japan

Fujitsu Component Limited
Gotanda-Chuo Building
3-5, Higashigotanda 2-chome, Shinagawa-ku
Tokyo 141, Japan
Tel: (81-3) 5449-7010
Fax: (81-3) 5449-2626
Email: promothq@ft.ed.fujitsu.com
Web: www.fcl.fujitsu.com

North and South America

Fujitsu Components America, Inc.
250 E. Caribbean Drive
Sunnyvale, CA 94089 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: components@us.fujitsu.com
Web: <http://us.fujitsu.com/components>

Europe

Fujitsu Components Europe B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: emea.fujitsu.com/components/

Asia Pacific

Fujitsu Components Asia Ltd.
102E Pasir Panjang Road
#01-01 Citilink Warehouse Complex
Singapore 118529
Tel: (65) 6375-8560
Fax: (65) 6273-3021
Email: fcal@fcal.fujitsu.com
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2014 Fujitsu Components Europe B.V. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes.

The use of the contents, data and information provided in this datasheet is at the users' own risk.

Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

Fujitsu Components Europe B.V. and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do Fujitsu Components Europe B.V. and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability for any representation or warrant of any kind, express or implied, including warranties of any kind for merchantability or fitness for particular use, with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. August 01, 2014