



CRST91/3

尺寸(Dimensions)H:32.4X27.5X28.0mm

L:32.4X27.5X20mm

特点 Features

- 1,体积小,重量轻,线圈功耗低,触点负载大.Small size,light weight,Low coil power consumption,heavy contact load.
- 2,抗冲击及抗震性强,可靠性高,寿命长.Strong anti-shock and anti-vibration,high reliability,long life.
- 3,可直接焊接在印刷线路板中,也可插入式安装.PC board mounting and Direct insert mounting available.
- 4,用于汽车,机床电器,电子设备,空调和各种家用电器.Suitable for automobile,machine,electronic equipment,air conditioner and household appliances applications.

订货信息 Ordering information

CRST91--C-S-DC12V--L

1 2 3 4 5

- 1,型号 Part number: CRST91/CRST93
- 2,触点形式 Contact arrangement:A:1A;B:1B;C:1C.
- 3,封装形式:S:试水式;Z:防尘式 Enclosure: S:Sealed type; Z:Dust cover
- 4,线圈额定电压 Coil rated voltage(V):DC:6,9,12,24,48
- 5,线圈功耗 Coil power consumption: L:0.6W; Nil: 0.9W

触点数据 Contact data

触点形式 Contact Arrangement		1A(1H)(SPST NO);1B(SPST NC);1C(1Z)(SPDT);
触点材料 Contact Material		AgSnO ₂ , AgCdO
触点负载(阻性) Conatct Rating(Resistive)		30A,40A/240VAC;30VDC 30A/277VAC;30VDC
最大切换功率 Max.Switching Power		1100W 7200AV
最大切换电压 Max.Switching Voltage		110VDC 300VAC 最大切换电流 Max.Switching Current:40A
触点阻性或压降 Contact Resistance or Voltage Drop		≤30m Ω
寿命 Operation Life	电气 Electrical	10 ⁵
	机械 Mechanical	10 ⁷

线圈参数 Coil Parameter

线圈电压 Coil voltage (VDC)		线圈电阻 Coil Resistance Ω ±10%	吸合电压 VDC(最大) Pick up Voltage VDC(Max) (额定电压的 75%) (75% of rated voltage)	释放电压 VDC Release voltage VDC(Min) (额定电压的 10%) (10% of rated voltage)	线圈功耗 Coil power consumption (W)	动作时间 Operate Time (mS)	释放时间 Release Time (mS)		
额定 Rated	最大 Max								
6	7.8	40	4.50	0.6	0.9	≤15	≤10		
12	15.6	160	9.00	1.2					
24	31.2	640	18.0	2.4					
48	62.4	2560	36.0	4.8					
6	7.8	60	4.50	0.6	0.6				
12	15.6	240	9.00	1.2					
24	31.2	960	18.0	2.4					
48	62.4	3840	36.0	4.8					

注意:1,使用的线圈电压低于线圈额定电压时将会损害继电器的工作.

2,吸合,释放电压仅供检测用,不是设计的使用指标.

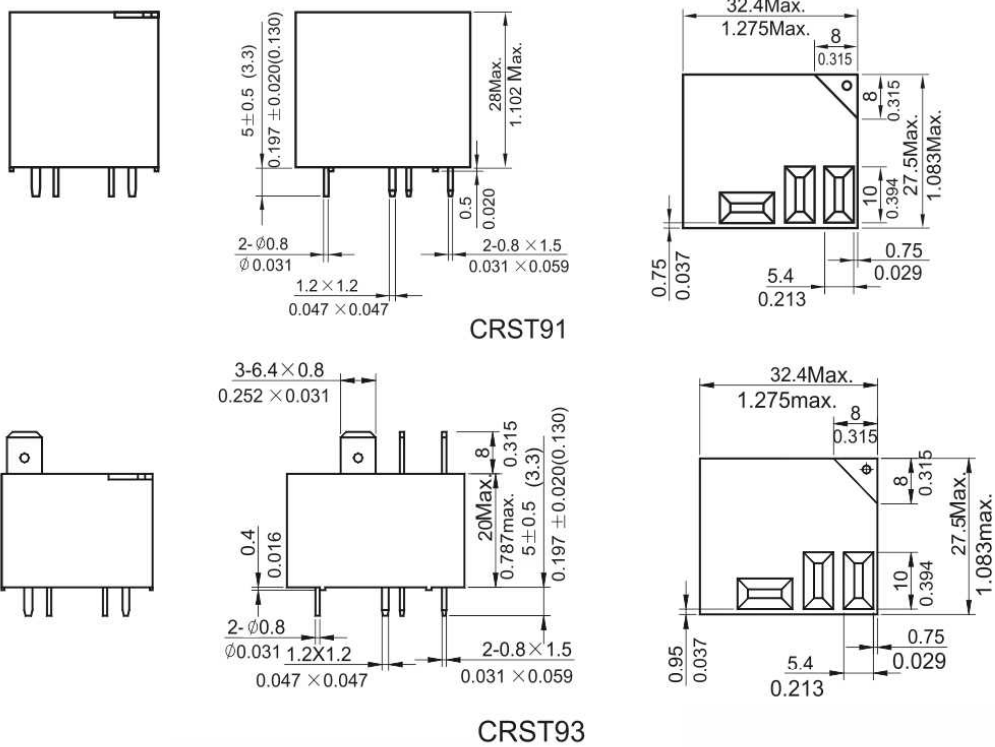


Caution:1,The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.

2,Pick up and release voltage are for test purposes only and are not be used as design criteria.

技术特性 Operation condition

绝缘电阻 Insulation Resistance	最少 1000M Ω min(at 500VDC)
介质耐压 Dielectric Strength	
断开触点间 Between Contacts	50Hz 1500V
触点与线圈间 Between Contacts and Coil	50Hz 2500V
耐冲击 Shock Resistance	200m/s ² 11ms
抗振性 Vibration Resistance	10~55Hz 双振幅 Double amplitude 1.5mm
引出端强度 Terminals Strength	10N
可焊性 Solderability	235 \pm 2 $^{\circ}$ C 3 \pm 0.5s $^{\circ}$ C
环境温度 Ambient Temperature	-40~125 $^{\circ}$ C
相当湿度 Relative Humidity	35%~85%(at 20 $^{\circ}$ C)
质(重)量 Mass	32g

外形尺寸 Dimensions(mm/Inch)

外形尺寸图
Dimensions接线图 (底视图)
Wiring diagram (Bottom view)安装尺寸图 (底视图)
Mounting (Bottom view)

注: 1) 尺寸以毫米为单位。

NOTES Dimensions are in millimeters.

2) 给出的等量英寸值仅供参考。

Inch equivalents are given for general information only